

EXPERIENCE CARPET TILES

paragón
CARPET TILES





Cresta - Castle Black, 9778N

PARAGON CARPET TILES

Paragon Carpet Tiles is part of National Floorcoverings, a group that is committed to sustainable UK manufacturing and producing quality products for its customers.

The Group has expertise in all areas of flooring, from manufacturing entrance matting, fibre bonded carpets, tufted carpet and tiles to specialised indoor and outdoor sports surfaces.

CONTENTS

DESIGN LOOP

Inspiration - Cresta	6
Inspiration - Mesh	10
Inspiration - Greda	14
Inspiration - Phase	18
Vapour	22
Total Contrast	26
Strobe	28
Workspace Linear	30
Codec	32

LOOP PILE

Workspace Loop	36
Evolve	38
Diversity and Diversity Groove	40
Vital	44
Toccarre	46
Sirocco and Sirocco Stripe	48
Macaw and Macaw Stripe	52

CUT PILE

Maestro	58
Workspace Cut Pile	60

LUXURY COMMERCIAL VINYL

Rappórt	64
Duera	66

ENTRANCE MATTING

PRIMARY:

Frameworks	70
Treadloc 25	72
Entrack 50	76

SECONDARY:

Workspace Entrance	80
--------------------	----

EXPLORE PARAGON CARPET TILES

National Floorcoverings	83
Environment and Manufacturing	84
Cleaning and Maintenance Guide	90
Contact Details	92



Strobe - Spark, 2621

DESIGN LOOP

Inspiration - Cresta	6
Inspiration - Mesh	10
Inspiration - Greda	14
Inspiration - Phase	18
Vapour	22
Total Contrast	26
Strobe	28
Workspace Linear	30
Codec	32



INSPIRATION
CRESTA

Cresta - Castle Black, 9778N




Castle Black, 9778N
(LRV - 1.91)




Silver Wolf, 8779N
(LRV - 3.94)



Bear Silver, 9749N
(LRV - 4.15)



Polar Trek, 1790N
(LRV - 18.94)



Lucent Grey, 1746N
(LRV - 7.63)




Glam Cyan, 6755N
(LRV - 3.60)


Style	1/12" Tufted Cut/Loop Tile
Yarn Construction	100% Solution Dyed Nylon
Pile Yarn Weight	750g/m ²
Pile Height	3mm - 5mm
Total Weight	4450g/m ²
Total Thickness	7mm ± 0.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >5 Shampoo (BS 1006:UK-TB:1990) >4 Dry Rubbing (BS EN ISO 105:B01) >4 Wet Rubbing (BS EN ISO 105:X12) >4
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Impact Noise Reduction	23dB
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004



TOTAL COLOURWAY OPTIONS - 6




BROADLOOM
DESIGN



TESSELLATED
DESIGN

AVAILABLE
FROM STOCK



MADE IN
BRITAIN

Tile colours representative in print, order a sample for true likeness.

INSPIRATION
CRESTA



Cresta - Polar Trek, 1790N




Cresta - Castle Black, 9778N



INSPIRATION
MESH

Mesh - Shadow Bone, 8778L

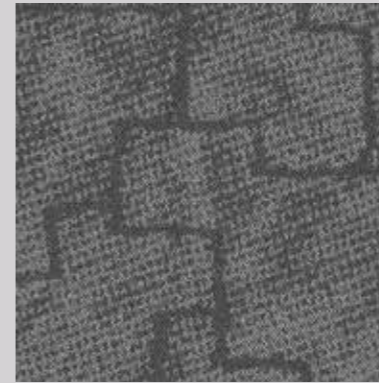

Obsidian Flash, 8775L
(LRV - 5.10)




Sonic Coal, 8773L
(LRV - 12.69)



Shadow Bone, 8778L
(LRV - 3.11)



Mild Sienna, 6755L
(LRV - 2.04)



Satin Ash, 9748L
(LRV - 4.20)



Burly Wood, 1745L
(LRV - 8.43)

Style	Tufted 1/12" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Nylon
Pile Yarn Weight	750g/m ²
Pile Height	2.5mm - 5.5mm
Total Weight	4450g/m ²
Total Thickness	7mm ± 0.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >5 Shampoo (BS 1006:UK-TB:1990) >4 Dry Rubbing (BS EN ISO 105:B01) >4 Wet Rubbing (BS EN ISO 105:X12) >4
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Impact Noise Reduction	23dB
Castor Chair Test	Suitable for continuous use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004



TOTAL COLOURWAY OPTIONS - 6

BROADLOOM
DESIGN

TESSELLATED
DESIGN

AVAILABLE
FROM STOCK

MADE IN
BRITAIN

Tile colours representative in print, order a sample for true likeness.

INSPIRATION
MESH



Mesh - Mild Sienna, 8755L



Mesh - Obsidian Flash, 8775L




INSPIRATION
GREDA


Greda - Crackled Station, 1763V



Livid Grey, 8773V
(LRV - 10.40)




Ghost Machine, 8775V
(LRV - 4.19)



Electric Azure, 6755V
(LRV - 3.77)



Crackled Station, 1763V
(LRV - 12.20)



Lime Spring, 5761V
(LRV - 24.37)




Moccasin, 3730V
(LRV - 10.37)


Style	Tufted 1/12" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Nylon
Pile Yarn Weight	750g/m ²
Pile Height	3mm - 6.5mm
Total Weight	4450g/m ²
Total Thickness	8mm ± 0.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >5 Shampoo (BS 1006:UK-TB:1990) >4 Dry Rubbing (BS EN ISO 105:B01) >4 Wet Rubbing (BS EN ISO 105:X12) >4
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Impact Noise Reduction	23dB
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004



TOTAL COLOURWAY OPTIONS - 6




BROADLOOM
DESIGN



TESSELLATED
DESIGN

AVAILABLE
FROM STOCK



MADE IN
BRITAIN

Tile colours representative in print, order a sample for true likeness.

INSPIRATION
GREDA




Greda - Crackled Station, 1763V




Greda - Ghost Machine, 8775V

INSPIRATION PHASE


Phase - Dodger Blue, 6657B

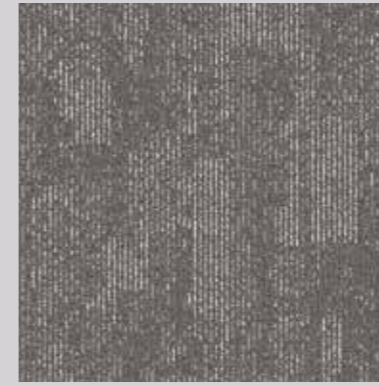

Gainsboro, 8675B
(LRV - 6.13)




Virtual Ebony, 8677B
(LRV - 2.87)




Charged Metal, 1648B
(LRV - 2.69)



Dodger Blue, 6657B
(LRV - 2.78)



Cloud Indigo, 6658B
(LRV - 5.07)




Navajo Brown, 3627B
(LRV - 3.24)


Style	Tufted 1/12" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Nylon
Pile Yarn Weight	610g/m ²
Pile Height	2.5mm - 5.5mm
Total Weight	4310g/m ²
Total Thickness	7mm ± 0.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >5 Shampoo (BS 1006:UK-TB:1990) >4 Dry Rubbing (BS EN ISO 105:B01) >4 Wet Rubbing (BS EN ISO 105:X12) >4
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Impact Noise Reduction	23dB
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004



TOTAL COLOURWAY OPTIONS - 6



BROADLOOM
DESIGN



TESSELLATED
DESIGN

AVAILABLE
FROM STOCK



MADE IN
BRITAIN

Tile colours representative in print, order a sample for true likeness.

INSPIRATION
PHASE



Phase - Cloud Indigo, 6658B



Phase - Navajo Brown, 3627B

VAPOUR


Vapour - Alchemy, 54568



Thermos, 82146
(LRV - 3.70)




Alchemy, 54568
(LRV - 10.74)



Wisp, 81434
(LRV - 5.94)



Distill, 84559
(LRV - 15.04)




Neboa, 74559
(LRV - 5.94)



Nitro, 63846
(LRV - 4.45)



Electron, 63888
(LRV - 7.55)



Haze, 63244
(LRV - 4.48)



Purify, 81111
(LRV - 7.52)




Brume, 18382
(LRV - 13.13)

Style	Tufted 1/12" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Nylon 6
Pile Yarn Weight	650g/m ²
Pile Height	2.5mm ± 0.5mm
Total Weight	3800g/m ²
Total Thickness	6mm ± 0.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Impact Noise Reduction	25dB
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	BREEAM® A Rated



TOTAL COLOURWAY OPTIONS - 10



RANDOM LAY DESIGN

AVAILABLE FROM STOCK



MADE IN BRITAIN

Tile colours representative in print, order a sample for true likeness.

VAPOUR



Vapour - Alchemy, 54568



Vapour - Distill, 84559



Vapour - Distill, 84559



TOTAL CONTRAST



Total Contrast - Palladium Sky, 91826



Palladium Sky, 91826
(LRV - 3.74)



Chrome Pelt, 83126
(LRV - 8.51)



Ocean Rocks, 64518
(LRV - 3.01)



Black Leaf, 52926
(LRV - 11.81)



Cracked Sapling, 10001
(LRV - 14.99)



Mellow Bark, 10203
(LRV - 11.69)


Colourways show 1sqm for pattern effect

ECONYL®


The ECONYL® Regeneration System recovers waste (fishing nets) which would otherwise end up in landfill or the ocean, causing serious damage to the ecosystem. The unique process that allows Aquafil to produce 100% regenerated Nylon yarn using waste material instead of fossil raw material.

Compared to common Nylon 6, ECONYL® fiber reduces approximately 50% of the CO2 equivalent emissions per kg of yarn, providing real savings in terms of emissions.

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed ECONYL® manufactured from recycled fishing nets
Pile Yarn Weight	600g/m ²
Pile Height	3mm
Total Weight	4390g/m ²
Total Thickness	6mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Impact Noise Reduction	26dB
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	BREEAM® A Rated

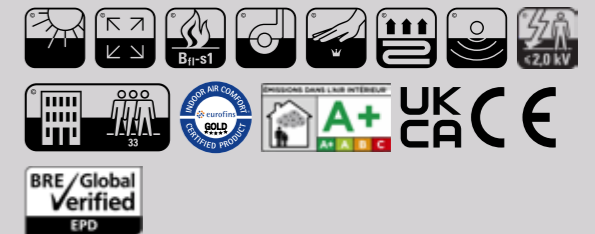

TOTAL COLOURWAY OPTIONS - 6



RANDOM LAY DESIGN


AVAILABLE FROM STOCK




Tile colours representative in print, order a sample for true likeness.




Strobe - Spark, 2621

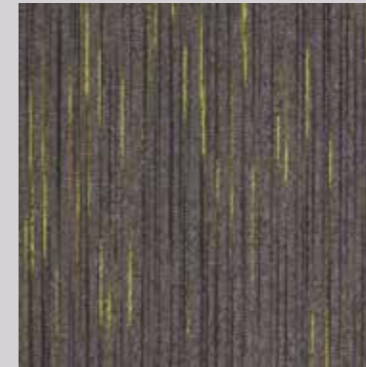

Flex, 2620
(LRV - 4.97)



Blaze, 2604
(LRV - 4.24)



Ignite, 2603
(LRV - 6.09)




Extreme, 2606
(LRV - 5.11)



Spark, 2621
(LRV - 4.57)



Vivid, 4504
(LRV - 4.38)




Rapid, 2614
(LRV - 5.53)




Breeze, 4109
(LRV - 6.04)



Force, 2605
(LRV - 7.47)




Plasma, 2619
(LRV - 4.39)

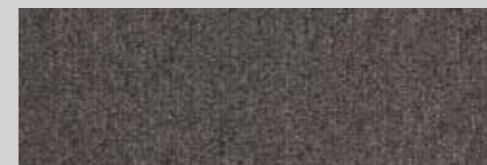


Grey Highlight Fusion, 8226
(LRV - 4.69)

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed / Space Dyed Nylon
Pile Yarn Weight	610g/m ²
Pile Height	3mm
Total Weight	4400g/m ²
Total Thickness	6mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Impact Noise Reduction	26dB
Castor Chair Test	Suitable for continuous use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	BREEAM® A Rated

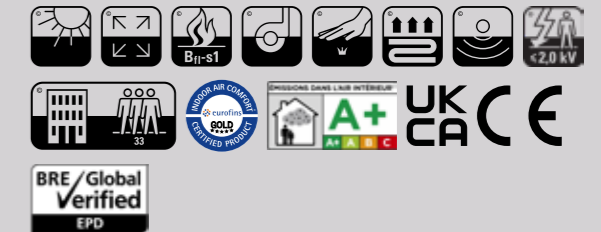

TOTAL COLOURWAY OPTIONS - 10+1

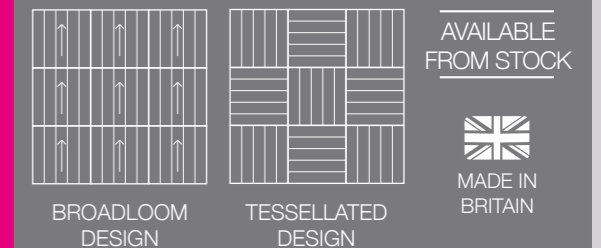

Tile colours representative in print, order a sample for true likeness.



WORKSPACE LINEAR

Workspace Linear - Islington Tunnel, 5014



Islington Tunnel, 5014
(LRV - 5.54)



Nobu Grey, 7002
(LRV - 15.67)



Docklands Grey, 3013
(LRV - 9.01)



Apollo Blue, 5004
(LRV - 4.42)



Millennium Blue, 3001
(LRV - 8.18)



Regents Canal, 4018
(LRV - 5.12)



Victoria Blue, 5181
(LRV - 2.92)



Clockhouse Blue, 4009
(LRV - 3.72)



Westow Park Plum, 3016 (LRV - 7.50)



Broadway, 3012
(LRV - 8.17)

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed / Space Dyed Nylon
Pile Yarn Weight	600g/m ²
Pile Height	3mm
Total Weight	4390g/m ²
Total Thickness	6mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Impact Noise Reduction	26dB
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	BREEAM® A Rated











TOTAL COLOURWAY OPTIONS - 10



BROADLOOM
DESIGN



TESSELLATED
DESIGN

AVAILABLE
FROM STOCK
















MADE IN
BRITAIN

Tile colours representative in print, order a sample for true likeness.



CODEC

Codec - Axis, 8228181 Hex, 7248181 Binary, 9183181 & Digital, 6176181

		<p>Style Tufted 1/10" Gauge Loop Pile Tile</p> <p>Yarn Construction 100% Solution Dyed Nylon</p> <p>Pile Yarn Weight 600g/m²</p> <p>Pile Height 3mm</p> <p>Total Weight 4390g/m²</p> <p>Total Thickness 6mm</p> <p>Backing 100% Envirobase - minimum of 75% recycled material</p> <p>Additional Backing Komfort Bac available on request</p> <p>Tile Size 50cm x 50cm</p> <p>Tiles Per Box 20 (5m²)</p> <p>Wear Classification Heavy Contract Class 33</p> <p>Luxury Class LC1</p> <p>Anti-static Suitable for use with computers. Less than 2Kv</p> <p>Colour Fastness Light (BS EN ISO 105:B02) >5 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5</p> <p>Flammability BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char</p> <p>BS EN 13501 Class Bfl-s1</p> <p>Impact Noise Reduction 26dB</p> <p>Castor Chair Test Suitable for intensive use with castor chairs</p> <p>Warranty 10 years</p> <p>VOC Content E1 in relation to EN 14041:2004</p> <p>Environmental Status BREEAM® A Rated</p>
		
		
		
		
		
		
		
		

Axis, 8181 (LRV - 4.00)

Axis Accent, 8228 (LRV - 5.78)

Binary, 9191 (LRV - 9.59)

Binary Accent, 9183 (LRV - 17.50)

Index, 2181 (LRV - 4.60)

Index Accent, 2247 (LRV - 7.73)

Hex, 7181 (LRV - 4.77)















Hex Accent, 7248 (LRV - 7.22)

Digital, 6181 (LRV - 4.32)

Digital Accent, 6176 (LRV - 4.62)

Pathway, 5151 (LRV - 11.59)


Pathway Accent, 5229 (LRV - 21.82)

TOTAL COLOURWAY OPTIONS - 12




BROADLOOM DESIGN




TESSELLATED DESIGN

AVAILABLE FROM STOCK



MADE IN BRITAIN


Tile colours representative in print, order a sample for true likeness.

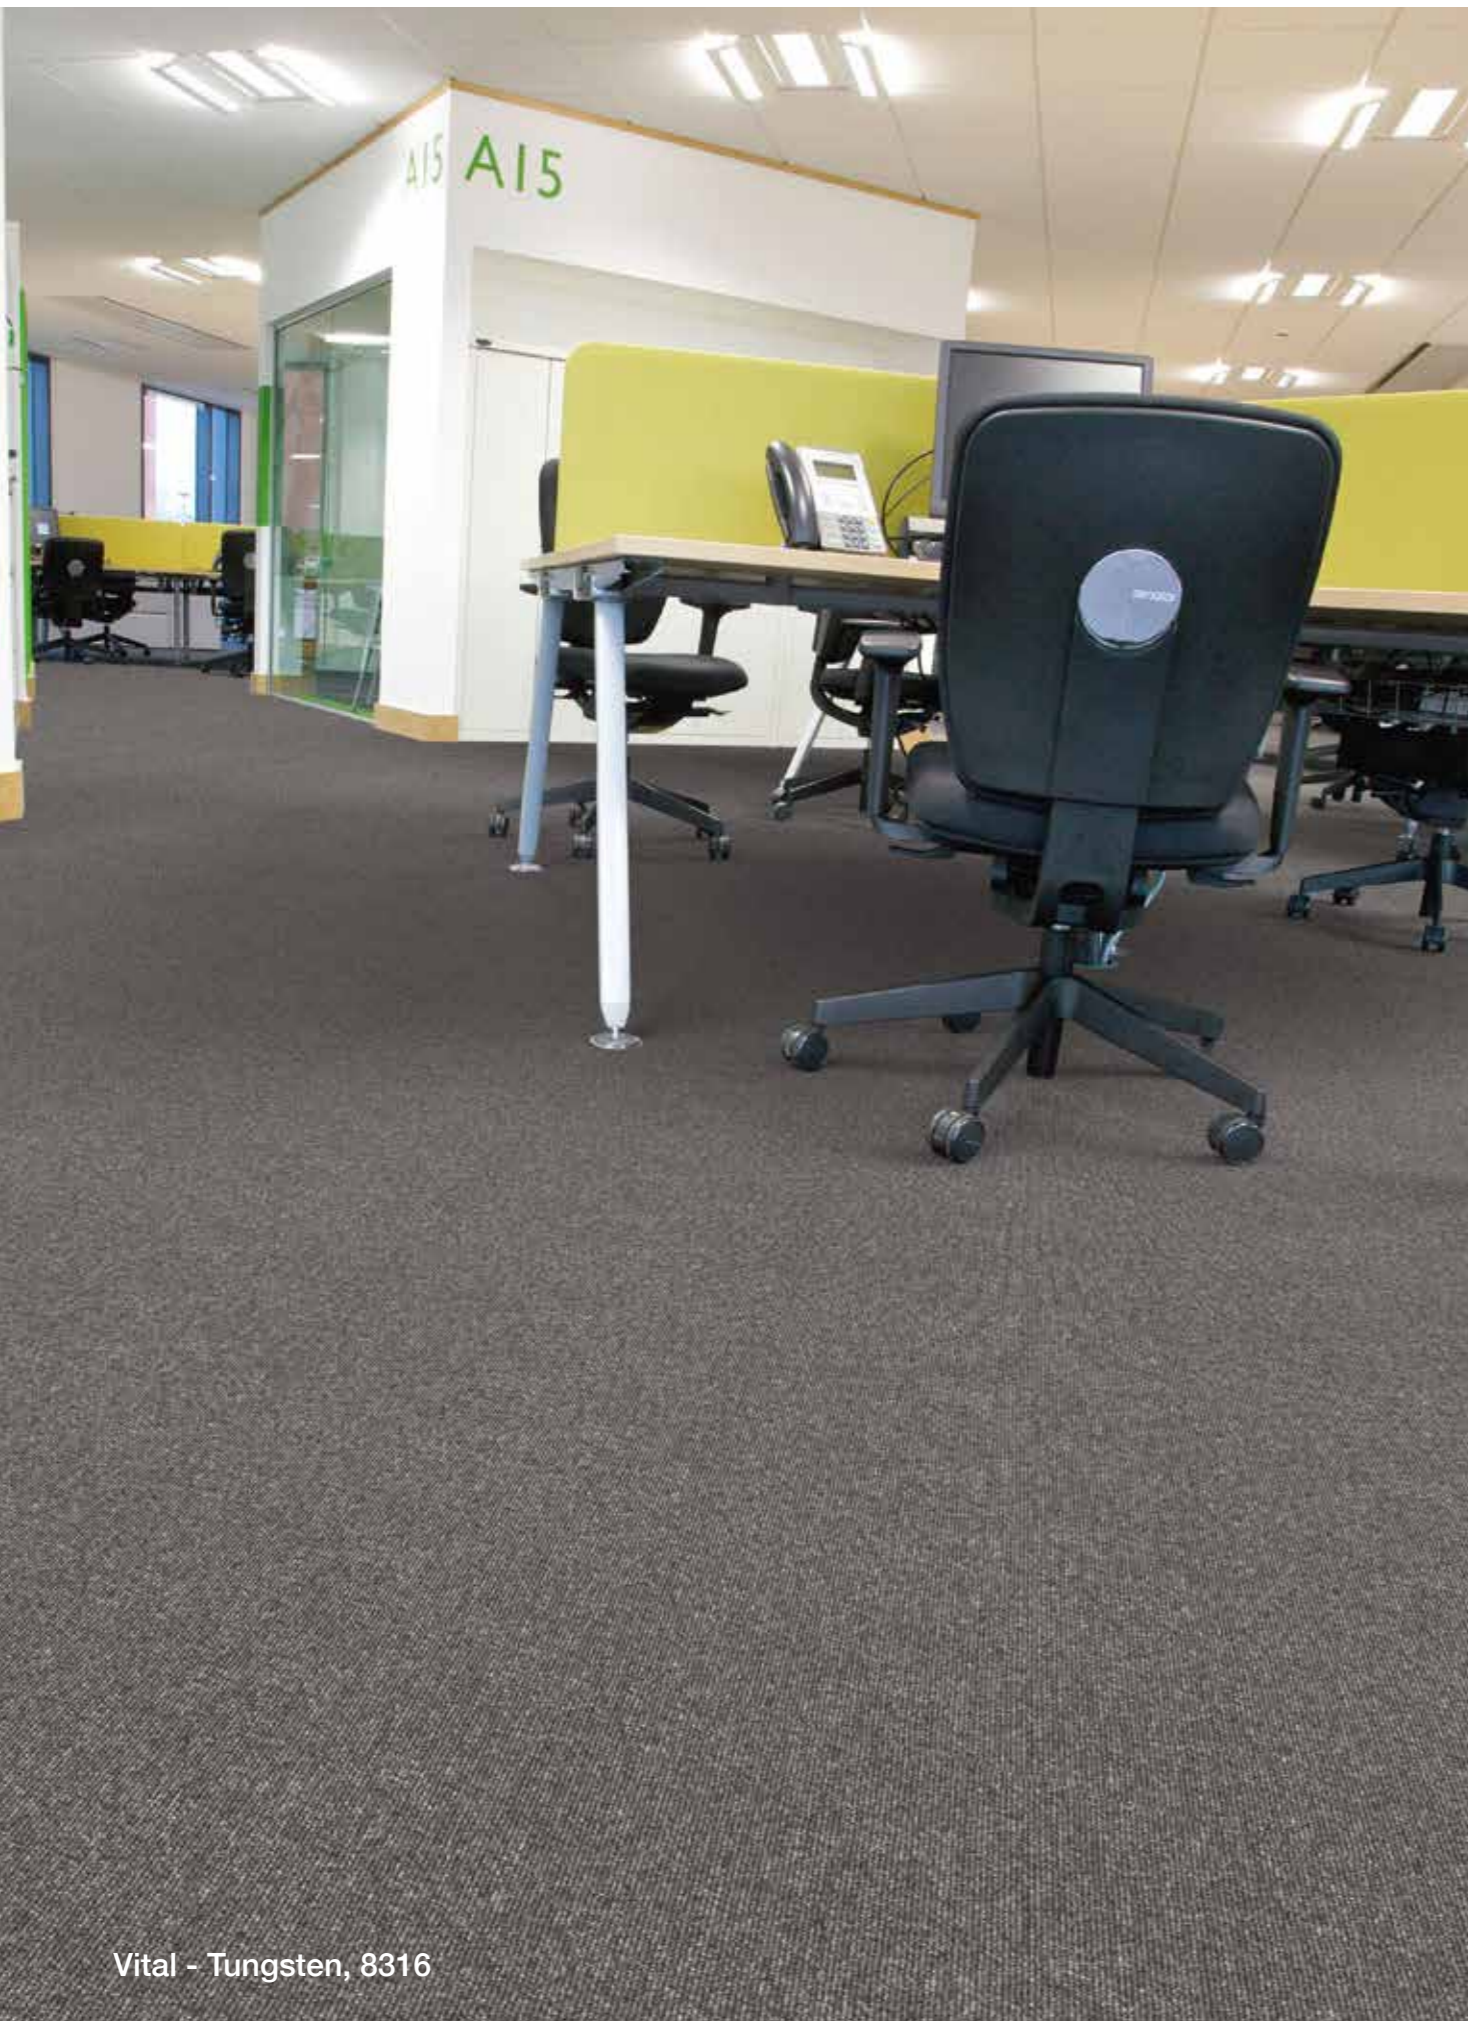

Vital - Tungsten, 8316

LOOP PILE

Workspace Loop	36
Evolve	38
Diversity and Diversity Groove	40
Vital	44
Toccarre	46
Sirocco and Sirocco Stripe	48
Macaw and Macaw Stripe	52

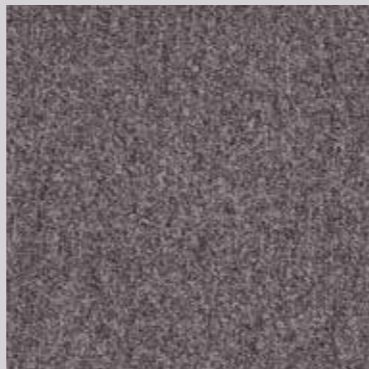

Silver, 8031
(LRV - 13.24)




Pampas, 5157
(LRV - 10.13)




Platinum, 9235
(LRV - 8.62)



Charcoal, 8050
(LRV - 6.36)



Graphite, 8025
(LRV - 5.51)




Onyx, 8181
(LRV - 2.47)




Moorland, 8052
(LRV - 10.05)



Blue Moon, 6123
(LRV - 7.68)



Kingfisher, 5329
(LRV - 10.12)




Indigo, 6049
(LRV - 4.37)



Midnight, 6159
(LRV - 4.17)



Blue Yonder, 6245
(LRV - 3.68)



Blueberry, 6155
(LRV - 8.61)




Lavender, 7035
(LRV - 8.20)




Magenta Rock, 7246
(LRV - 4.42)



Rose, 2152
(LRV - 6.36)




Ruby, 2182
(LRV - 5.35)



Sandstone, 1015
(LRV - 17.28)



Sepia, 1160
(LRV - 7.20)




Apple, 6229
(LRV - 21.82)

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Nylon
Pile Yarn Weight	580g/m ²
Pile Height	3mm
Total Weight	4370g/m ²
Total Thickness	6mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Impact Noise Reduction	26dB
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	BREEAM® A Rated



TOTAL COLOURWAY OPTIONS - 20

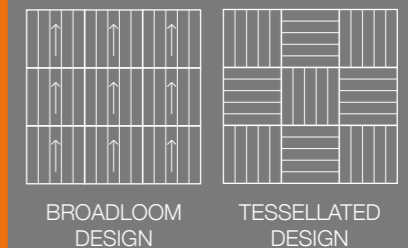

AVAILABLE FROM STOCK




Tile colours representative in print, order a sample for true likeness.

Workspace Loop - Blueberry, 6155



Evolve - Atlantis, 6834

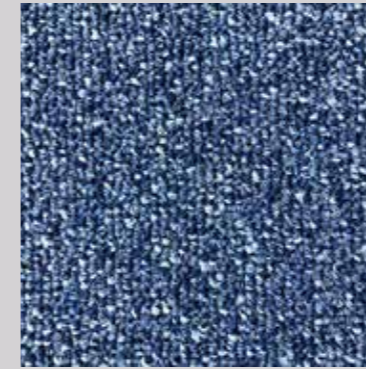

Hydra, 6555
(LRV - 7.66)



Reef, 6838
(LRV - 12.00)



Pebble, 8837
(LRV - 9.93)



Basalt, 8831
(LRV - 7.30)



Shoreline, 1132
(LRV - 9.62)



Atlantis, 6834
(LRV - 3.35)



Rockpool, 8887
(LRV - 5.89)



Lagoon, 6839
(LRV - 5.04)




Mineral, 8836
(LRV - 10.23)




Tide, 6490
(LRV - 7.05)

Style	Tufted Loop Pile
Yarn Construction	100% Solution Dyed Nylon (75% Recycled content)
Tuft Gauge	1/10"
Pile Yarn Weight	580g/m ²
Pile Height	3mm (+/- 0.5mm)
Total Weight	4,070g/m ²
Pile Density	214,000 /m ²
Thickness	6mm (+/- 0.5mm)
Backing	100% Envirobase - minimum of 75% recycled materials
Anti-static	Suitable for use with computers. Less than 2Kv
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Colour Fastness	Light (BS EN ISO 105:B02) >6 To Water (BS EN ISO 105:E01) 4-5 To Shampoo (BS 1006-UK-TB) 4-5 Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS 4790 Low Radius of Char EN 13501-1 Classification Bfl-s1
Impact Noise Reduction	26dB
Castor Chair BS EN 985	r value 3.3 - Suitable for intensive use
Warranty	10 Years
VOC	E1 in relation to EN 14041:2004
Environmental Status	BREEAM® A Rated

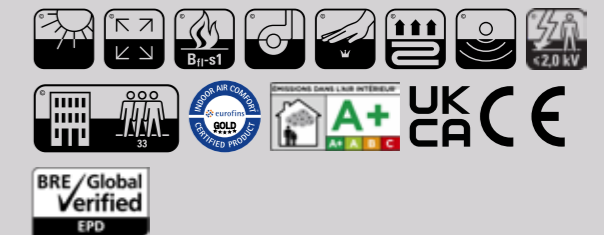

TOTAL COLOURWAY OPTIONS - 10

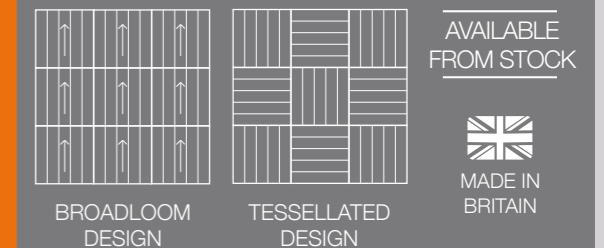

Tile colours representative in print, order a sample for true likeness.



DIVERSITY

Diversity - London Stone 820 & Foundry Grey 810

 <p>Panther, 812 (LRV - 2.94)</p>	 <p>Foundry Grey, 810 (LRV - 6.63)</p>	 <p>Lupus Grey, 811 (LRV - 5.32)</p>	 <p>London Stone, 820 (LRV - 10.04)</p>	 <p>Mouse, 830 (LRV - 16.28)</p>	 <p>Liberty, 612 (LRV - 3.13)</p>	 <p>Denim, 616 (LRV - 4.95)</p>	 <p>Electric, 625 (LRV - 5.12)</p>	 <p>Skylight, 640 (LRV - 7.65)</p>	 <p>Racing Green, 505 (LRV - 4.89)</p>	 <p>Grasshopper, 550 (LRV - 14.41)</p>	 <p>Razzmic Berry, 740 (LRV - 6.07)</p>	 <p>Purple Rain, 750 (LRV - 4.26)</p>	 <p>Blazer, 210 (LRV - 4.52)</p>	 <p>Bark, 108 (LRV - 9.82)</p>	<table border="0"> <tr> <td>Style</td> <td>Tufted 1/10" Gauge Loop Pile Tile</td> </tr> <tr> <td>Yarn Construction</td> <td>100% Solution Dyed Nylon</td> </tr> <tr> <td>Pile Yarn Weight</td> <td>540g/m²</td> </tr> <tr> <td>Pile Height</td> <td>3mm</td> </tr> <tr> <td>Total Weight</td> <td>4330g/m²</td> </tr> <tr> <td>Total Thickness</td> <td>5.5mm</td> </tr> <tr> <td>Backing</td> <td>100% Envirobase - minimum of 75% recycled material</td> </tr> <tr> <td>Additional Backing</td> <td>Komfort Bac available on request</td> </tr> <tr> <td>Tile Size</td> <td>50cm x 50cm</td> </tr> <tr> <td>Tiles Per Box</td> <td>20 (5m²)</td> </tr> <tr> <td>Wear Classification</td> <td>Heavy Contract Class 33</td> </tr> <tr> <td>Luxury Class</td> <td>LC1</td> </tr> <tr> <td>Anti-static</td> <td>Suitable for use with computers. Less than 2Kv</td> </tr> <tr> <td>Colour Fastness</td> <td>Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5</td> </tr> <tr> <td>Flammability</td> <td>BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char</td> </tr> <tr> <td>BS EN 13501</td> <td>Class Bfl-s1</td> </tr> <tr> <td>Impact Noise Reduction</td> <td>26dB</td> </tr> <tr> <td>Castor Chair Test</td> <td>Suitable for intensive use with castor chairs</td> </tr> <tr> <td>Warranty</td> <td>10 years</td> </tr> <tr> <td>VOC Content</td> <td>E1 in relation to EN 14041:2004</td> </tr> <tr> <td>Environmental Status</td> <td>BREEAM® A Rated</td> </tr> </table>	Style	Tufted 1/10" Gauge Loop Pile Tile	Yarn Construction	100% Solution Dyed Nylon	Pile Yarn Weight	540g/m ²	Pile Height	3mm	Total Weight	4330g/m ²	Total Thickness	5.5mm	Backing	100% Envirobase - minimum of 75% recycled material	Additional Backing	Komfort Bac available on request	Tile Size	50cm x 50cm	Tiles Per Box	20 (5m ²)	Wear Classification	Heavy Contract Class 33	Luxury Class	LC1	Anti-static	Suitable for use with computers. Less than 2Kv	Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5	Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char	BS EN 13501	Class Bfl-s1	Impact Noise Reduction	26dB	Castor Chair Test	Suitable for intensive use with castor chairs	Warranty	10 years	VOC Content	E1 in relation to EN 14041:2004	Environmental Status	BREEAM® A Rated
Style	Tufted 1/10" Gauge Loop Pile Tile																																																								
Yarn Construction	100% Solution Dyed Nylon																																																								
Pile Yarn Weight	540g/m ²																																																								
Pile Height	3mm																																																								
Total Weight	4330g/m ²																																																								
Total Thickness	5.5mm																																																								
Backing	100% Envirobase - minimum of 75% recycled material																																																								
Additional Backing	Komfort Bac available on request																																																								
Tile Size	50cm x 50cm																																																								
Tiles Per Box	20 (5m ²)																																																								
Wear Classification	Heavy Contract Class 33																																																								
Luxury Class	LC1																																																								
Anti-static	Suitable for use with computers. Less than 2Kv																																																								
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5																																																								
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char																																																								
BS EN 13501	Class Bfl-s1																																																								
Impact Noise Reduction	26dB																																																								
Castor Chair Test	Suitable for intensive use with castor chairs																																																								
Warranty	10 years																																																								
VOC Content	E1 in relation to EN 14041:2004																																																								
Environmental Status	BREEAM® A Rated																																																								





TOTAL COLOURWAY OPTIONS - 15


 <p>BROADLOOM DESIGN</p>	 <p>TESSELLATED DESIGN</p>	<p>AVAILABLE FROM STOCK</p>  <p>MADE IN BRITAIN</p>
---	---	--

Tile colours representative in print, order a sample for true likeness.




DIVERSITY GROOVE


Diversity Groove - Armada, 812820

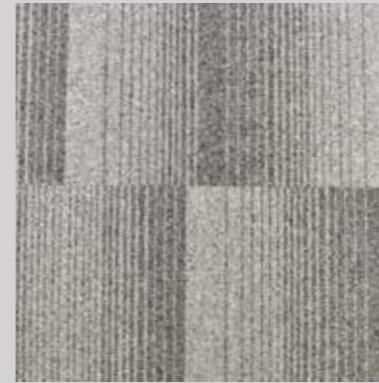

Vibe, 810820
(LRV - 8.04)




Asha, 812810
(LRV - 4.39)



Armada, 812820
(LRV - 5.31)



Jaxx, 616810
(LRV - 5.74)




Gusto, 616812
(LRV - 3.57)

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Nylon
Pile Yarn Weight	540g/m ²
Pile Height	3mm
Total Weight	4330g/m ²
Total Thickness	5.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Impact Noise Reduction	26dB
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	BREEAM® A Rated


Diversity Groove is a random lay product



TOTAL COLOURWAY OPTIONS - 5



BROADLOOM DESIGN



TESSELLATED DESIGN



RANDOM LAY DESIGN

AVAILABLE FROM STOCK



Tile colours representative in print, order a sample for true likeness.



Vital - Tungsten, 8316



Titanium, 8001
(LRV - 7.11)



Mercury, 878316
(LRV - 3.91)



Tungsten, 8316
(LRV - 5.09)



Carbon, 8007
(LRV - 2.54)



Krypton, 6100
(LRV - 11.69)



Hydrogen, 6120
(LRV - 9.40)



Granite, 8302
(LRV - 9.86)



Glacier, 6013
(LRV - 6.90)



Marine, 6310
(LRV - 6.30)




Sea Blue, 6011
(LRV - 5.49)



Nickel, 868302
(LRV - 7.54)



Zinc, 878302
(LRV - 6.91)



Ice, 876013
(LRV - 4.85)



Arctic, 876310
(LRV - 4.26)




Zicron, 6890
(LRV - 10.93)




Oxide, 1193
(LRV - 8.77)

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Nylon
Pile Yarn Weight	500g/m ²
Pile Height	3mm
Total Weight	4090g/m ²
Total Thickness	5.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Impact Noise Reduction	24dB
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	BREEAM® A Rated

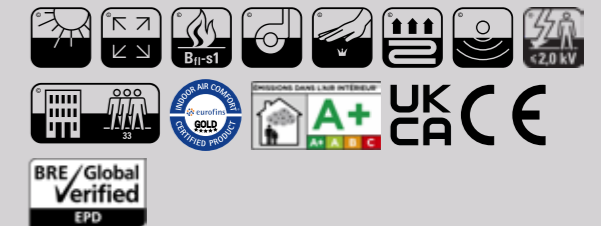

TOTAL COLOURWAY OPTIONS - 16

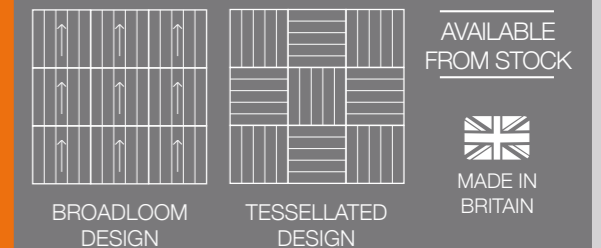


Tile colours representative in print, order a sample for true likeness.



TOCCARRE

Toccarre - Tutto, 6569 Blu, 6558 Montagna, 1549 & Fresco 1652

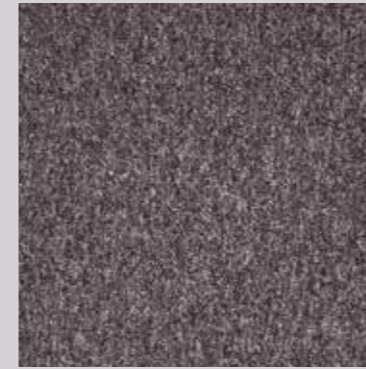

Termini, 8554
(LRV - 8.96)



Grigia, 9559
(LRV - 16.22)




Tutto, 6569
(LRV - 2.19)



Moderno, 6553
(LRV - 4.98)



Azzurra, 6339
(LRV - 7.75)



Blu, 6558
(LRV - 8.91)



Fresco, 1652
(LRV - 7.85)



Marrone, 1656
(LRV - 8.88)



Montagna, 1549
(LRV - 13.25)



Menta, 5560
(LRV - 6.34)




La Mela, 5550
(LRV - 8.36)




Desmo, 2640
(LRV - 4.52)

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Polypropylene
Pile Yarn Weight	630g/m ²
Pile Height	3mm
Total Weight	4420g/m ²
Total Thickness	6mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Cfl-s1
Impact Noise Reduction	25dB
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004
Environmental Status	BREEAM® A Rated

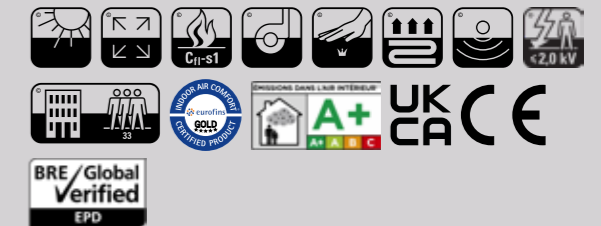

TOTAL COLOURWAY OPTIONS - 12

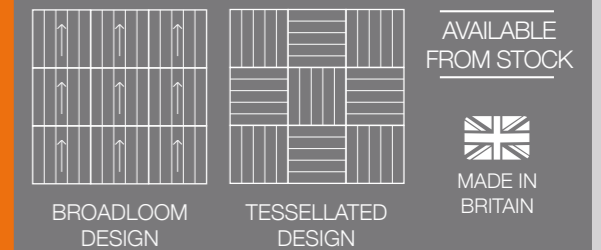

Tile colours representative in print, order a sample for true likeness.



SIROCCO

Sirocco - Pewter, 171S & Tempest, 277S



Jet, 821S
(LRV - 2.78)



Quartz, 101S
(LRV - 5.15)




Pewter, 171S
(LRV - 15.55)




Sapphire, 501S
(LRV - 4.95)




Blue John, 896S
(LRV - 5.78)



Topaz, 458S
(LRV - 8.50)




Tempest, 277S
(LRV - 3.22)



Paprika, 459S
(LRV - 6.71)



Tanzanite, 743S
(LRV - 4.84)



Lime, 318S
(LRV - 15.29)

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Polypropylene
Pile Yarn Weight	580g/m ²
Pile Height	3.5mm
Total Weight	4370g/m ²
Total Thickness	6.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Impact Noise Reduction	24dB
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004



TOTAL COLOURWAY OPTIONS - 10

BROADLOOM
DESIGN

TESSELLATED
DESIGN

AVAILABLE
FROM STOCK


MADE IN
BRITAIN

Tile colours representative in print, order a sample for true likeness.




SIROCCO STRIPE

Sirocco Stripe - Spearmint, 318101S & Liquorice, 821101

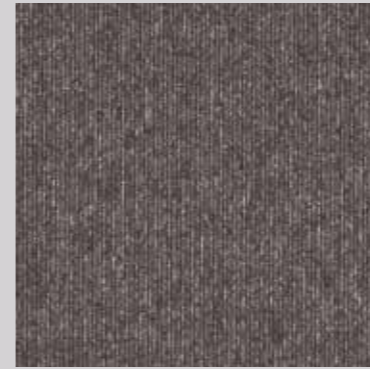


Liquorice, 821101S
(LRV - 3.79)



Humbug, 101171S
(LRV - 12.76)



Blue Candy, 501458S
(LRV - 7.23)



Bubblegum, 821458S
(LRV - 5.66)



Spearmint, 318101S
(LRV - 9.89)

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Polypropylene
Pile Yarn Weight	580g/m ²
Pile Height	3.5mm
Total Weight	4370g/m ²
Total Thickness	6.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional Backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Impact Noise Reduction	24dB
Castor Chair Test	Suitable for intensive use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004



TOTAL COLOURWAY OPTIONS - 5

TESELLATED DESIGN

AVAILABLE FROM STOCK

MADE IN BRITAIN

Tile colours representative in print, order a sample for true likeness.



MACAW

Macaw - Jet, 821M



Jet, 821M
(LRV - 2.68)



Quartz, 101M
(LRV - 5.94)




Pewter, 171M
(LRV - 15.29)



Sapphire, 501M
(LRV - 5.02)



Aegean, 831M
(LRV - 8.17)




Paprika, 459M
(LRV - 6.24)

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Polypropylene
Pile Yarn Weight	420g/m ²
Pile Height	3.5mm
Total Weight	4210g/m ²
Total Thickness	6mm
Backing	100% Envirobase - minimum of 75% recycled material
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	General Contract
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Efl
Impact Noise Reduction	22dB
VOC Content	E1 in relation to EN 14041:2004



TOTAL COLOURWAY OPTIONS - 6

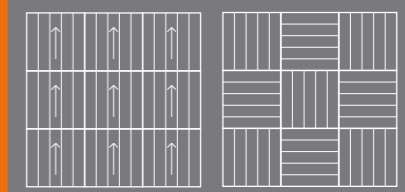

BROADLOOM DESIGN TESSELLATED DESIGN

AVAILABLE FROM STOCK
 MADE IN BRITAIN

Tile colours representative in print, order a sample for true likeness.



MACAW STRIPE

Macaw Stripe - Jet Quartz, 821101M & Lime Quartz, 318101M




Jet / Quartz, 821101M
(LRV - 3.82)



Quartz / Pewter, 101171M
(LRV - 12.56)



Aegean / Sapphire, 831501M
(LRV - 6.75)




Lime / Quartz, 318101M
(LRV - 9.33)

Style	Tufted 1/10" Gauge Loop Pile Tile
Yarn Construction	100% Solution Dyed Polypropylene
Pile Yarn Weight	420g/m ²
Pile Height	3.5mm
Total Weight	4210g/m ²
Total Thickness	6mm
Backing	100% Envirobase - minimum of 75% recycled material
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	General Contract
Luxury Class	LC1
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >6 Shampoo (BS 1006:UK-TB:1990) 4-5 Dry Rubbing (BS EN ISO 105:B01) 4-5 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Efl
Impact Noise Reduction	22dB
VOC Content	E1 in relation to EN 14041:2004



TOTAL COLOURWAY OPTIONS - 4



TESSELLATED DESIGN

AVAILABLE FROM STOCK



Tile colours representative in print, order a sample for true likeness.



Workspace Cutpile - Steel Grey, 8031C



CUT PILE

Maestro	58
Workspace Cut Pile	60




MAESTRO

Maestro - Red, 501



Charcoal, 903
(LRV - 3.05)



Twilight Cinders, 991
(LRV - 2.18)



Silver, 900
(LRV - 12.15)



Woodland Fern*, 662
(LRV - 16.47)



Brooklyn Nights, 963
(LRV - 5.06)



Sapphire*, 101
(LRV - 6.43)




Celestial Blue*, 569
(LRV - 10.34)



Blue Diamond, 506
(LRV - 12.87)




Turquoise*, 200
(LRV - 7.76)



Steel, 902
(LRV - 5.88)



Night Jewel, 994
(LRV - 12.55)



Deep Blue, 103
(LRV - 2.72)



Royal Regatta, 553
(LRV - 3.36)




Azure Fusion*, 595
(LRV - 6.81)



Teal, 100
(LRV - 9.23)



Emerald Orchestra*, 511
(LRV - 9.26)



Dark Green, 201
(LRV - 3.95)



Dublin Bay, 613
(LRV - 9.18)



Cocoa Blush, 830
(LRV - 5.94)



Dusty Pink*, 800
(LRV - 5.97)



Sunflower Symphony*, 827
(LRV - 12.76)



Beige*, 600
(LRV - 17.94)



Bracken Salts, 817
(LRV - 19.35)



Nutshell, 386
(LRV - 22.44)



Auburn Falls*, 322
(LRV - 16.83)



Volcanic Splash*, 314
(LRV - 7.96)



Red, 501
(LRV - 5.50)



Indian Ivy*, 601
(LRV - 18.47)



Sycamore, 700
(LRV - 6.22)



Delhi Bazaar, 463
(LRV - 6.85)



Velvet Truffle, 823
(LRV - 10.99)



Earth Glaze, 224
(LRV - 18.24)




Gold*, 300
(LRV - 22.17)



Coral, 400
(LRV - 15.53)



Claret, 500
(LRV - 4.16)



Hot Paprika, 307
(LRV - 8.79)

Style	Tufted 1/10" Gauge Cut Pile Tile
Yarn Construction	100% Nylon 66
Pile Yarn Weight	1050g/m ²
Pile Height	5mm
Total Weight	4650g/m ²
Total Thickness	8mm
Backing	100% Envirobase - minimum of 75% recycled material
Additional backing	Komfort Bac available on request
Tile Size	50cm x 50cm
Tiles Per Box	20 (5m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC2
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) >5 Wet Rubbing (BS EN ISO 105:X12) >4
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Impact Noise Reduction	28dB
Castor Chair Test	Suitable for use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004



TOTAL COLOURWAY OPTIONS - 36

BROADLOOM DESIGN

TESSELLATED DESIGN

AVAILABLE FROM STOCK

Tile colours representative in print, order a sample for true likeness.

*These colours are subject to a minimum order quantity of 200m²



WORKSPACE CUT PILE

Workspace Cutpile - Iron Grey, 8025C Costal Blue, 6159C Gecko Green, 5009C & Cayenne, 3038C.



Steel Grey, 8031C
(LRV - 11.62)



Iron Grey, 8025C
(LRV - 5.26)



Coastal Blue, 6159C
(LRV - 3.59)



Sky Blue, 6123C
(LRV - 7.34)



Biscay Blue, 6051C
(LRV - 3.35)



Nordic Green, 5011C
(LRV - 8.15)



Gecko Green, 5009C
(LRV - 9.72)




Grape Blue, 6155C
(LRV - 6.91)



Lilac, 7035C
(LRV - 6.59)



Salsa, 7040C
(LRV - 3.28)



Cayenne, 3038C
(LRV - 6.11)



Wheat, 1015C
(LRV - 16.70)

Style	Tufted 1/10" Gauge Cut Pile Tile
Yarn Construction	100% Solution Dyed Nylon
Pile Yarn Weight	850g/m ²
Pile Height	5mm
Total Weight	4650g/m ²
Total Thickness	8.5mm
Backing	100% Envirobase - minimum of 75% recycled material
Tile Size	50cm x 50cm
Tiles Per Box	16 (4m ²)
Wear Classification	Heavy Contract Class 33
Luxury Class	LC2
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) 6 Wet Rubbing (BS EN ISO 105:X12) 4-5
Flammability	BS5287 Assessment and labelling of Textile Floorcovering tested to BS4790 (Hot Metal Nut Test) - Low Radius of Char
BS EN 13501	Class Bfl-s1
Impact Noise Reduction	28dB
Castor Chair Test	Suitable for use with castor chairs
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004



TOTAL COLOURWAY OPTIONS - 12

BROADLOOM
DESIGN

TESSELLATED
DESIGN

AVAILABLE
FROM STOCK

MADE IN
BRITAIN

Tile colours representative in print, order a sample for true likeness.



Duera - Edwardian Oak, 3131 & Codec - Pathway Accent, 5229181

LUXURY COMMERCIAL VINYL

Rappórt

64

Duera

66



RAPPÓRT

Rapport - Shadow Ash, 2894 Dockyard Oak, 2947 & Chalet Oak, 2948

WOOD EFFECT



Grey Limed Oak, 2798



Lakeside Pine, 2889




Burnt Sienna Wood, 2893



Shadow Ash, 2894



French Grey Elm*, 2895



Bowland Oak, 2896



Midsummer Oak, 2897



Orchard Oak, 2898



Kentucky Timberwood, 2899




Dockyard Oak, 2947




Chalet Oak, 2948

STONE EFFECT



Seasoned Concrete, 2969



Copper Metalstone, 2970



Dark Metalstone, 2979



Fresh Concrete, 2799



Ashen Concrete, 2796

Style	Luxury Commercial Vinyl
Material	Heterogenous PVC
Surface Treatment	PUR
Total Weight	4290g/m ²
Total Thickness	2.5mm
Wear Layer Thickness	0.55mm
Wood Effect Plank Size	18.42cm x 121.92cm *152.4 x 1219.2
Stone Effect Plank Size	45.72cm x 91.44cm
Wood Effect Planks Per Box	15 (3.37m ²)
Stone Effect Planks Per Box	8 (3.34m ²)
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) ≥6
Flammability BS EN 13501	Class Bfl-s1
Castor Chair Test	Suitable for use with castor chairs
Dimensional Stability	<0.1%
Residual Indentation	0.05mm
Underfloor Heating	Suitable, maximum 27°C



UK
CA CE


*152.4 x 1219.2



DUERA

Duera - Edwardian Oak, 3131 & Barleycorn Oak, 3128

WOOD EFFECT



Twilight Ash, 3121



Barleycorn Oak, 3128



Devonshire Oak, 3129



Edwardian Oak, 3131



Dark Linear Wood, 3123




Wharf Side Ash, 3124




Hemingway Oak, 3126

STONE EFFECT



Polished Cement, Tile, 3132



Alloyed Cement, Tile, 3133



Downtown Cement, Tile, 3135



Suburban Cement, Tile, 3134



Cliffside Slate, Plank, 3136

Style	Luxury Commercial Vinyl
Material	Heterogenous PVC
Surface Treatment	PUR
Total Weight	8000g/m ²
Total Thickness	5mm
Wear Layer Thickness	0.7mm
Wood Effect Plank Size	17.78cm x 121.92cm
Stone Effect Plank Size	30.48cm x 60.96cm
Stone Effect Tile Size	60cm x 60cm
Wood Effect Planks Per Box	10 (2.17m ²)
Stone Effect Tiles Per Box	8 (1.86m ²)
Stone Effect Tiles Per Box	6 (2.16m ²)
Anti-static	Suitable for use with computers. Less than 2Kv
Colour Fastness	Light (BS EN ISO 105:B02) ≥6
Flammability BS EN 13501	Class Bfl-s1
Castor Chair Test	Suitable for use with castor chairs
Dimensional Stability	<0.1%
Residual Indentation	0.05mm
Underfloor Heating	Suitable, maximum 27°C





Frameworks 22C - Workspace Entrance Vulcan Inserts

ENTRANCE MATTING

PRIMARY

Frameworks	70
Treadloc 25	72
Entrack 50	76
Treadsure 205	78

SECONDARY

Workspace Entrance	80
--------------------	----


PRIMARY FRAMEWORKS

Frameworks is a unique range of tough and durable aluminium entrance systems with a host of material and colour insert options.

How to choose your frameworks system:


Stage 1:

Select your height

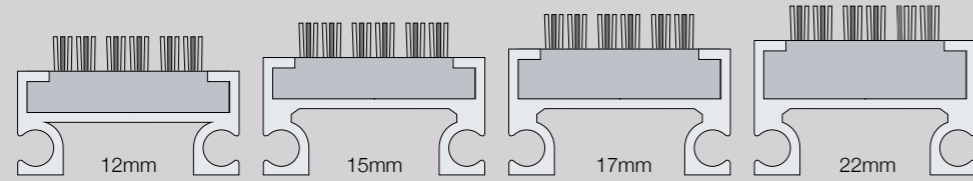



Stage 2:

Pick your construction

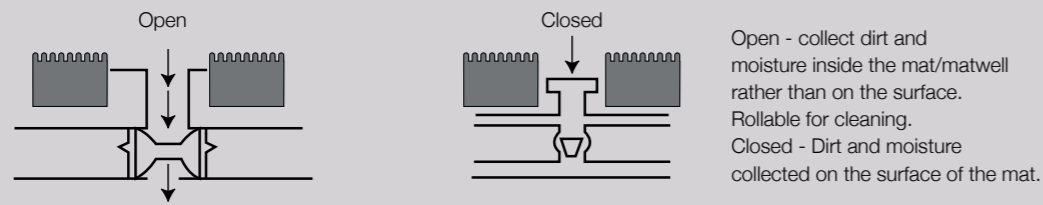


Stage 3:

Pick your insert from 13 options

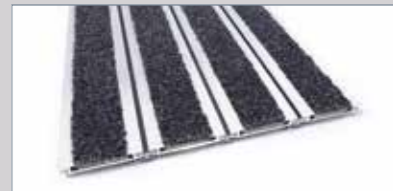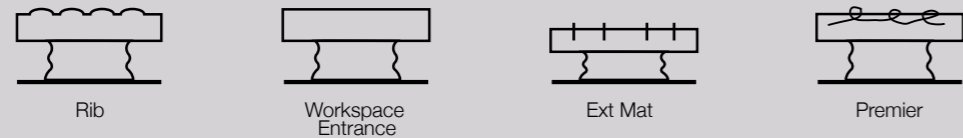


Frameworks 12

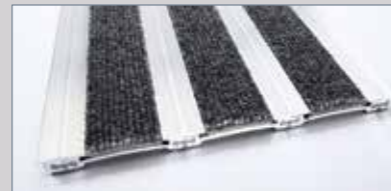


Frameworks 15C




Frameworks 17OP

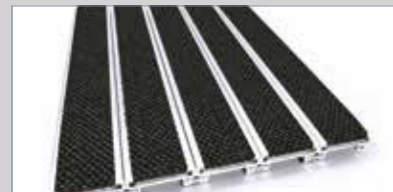


Frameworks 17C

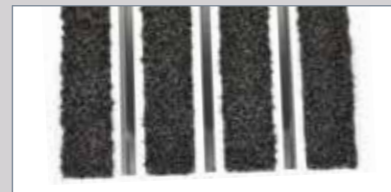


Frameworks 22OP

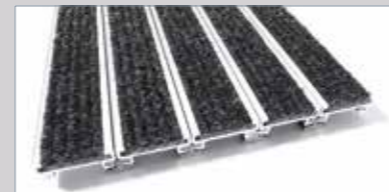

Frameworks 22C

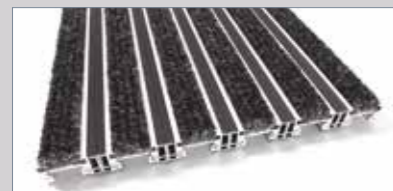

Frameworks 17CS

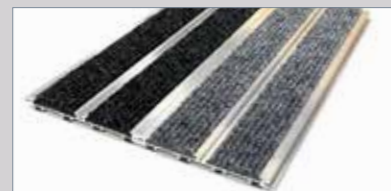

Frameworks Clic-Fix

C = Closed
OP = Open
CS = Closed Scraper
DR = Drainable



Available colourways:



MW Rib
Light Grey




MW Rib
Anthracite




MW Rib
Natural




MW Rib
HD Deep Blue




Workspace
Entrance Vulcan




Workspace
Entrance Victor




Workspace
Entrance Viscount




Workspace
Entrance Vixen



Premier
Dark Blue



Premier
Charcoal




Premier
Mercury



EXT Mat
Anthracite


MW Maxim



Anthracite



Light Grey



Deep Blue



Natural

Accessories:



T-Bar



10mm-25mm Framing



MW Ramp System



PRIMARY TREADLOC 25


Treadloc 25 by Mat.Works is a revolutionary modular matting solution. Manufactured from nitrile rubber, the 25cm x 25cm tile may be small but packs an almighty punch when it comes to performance.

Specifically designed to withstand heavy footfall, Treadloc 25 will not expand, contract, fade or become brittle, nor will it bend or buckle under pressure making it an ideal heavy contract solution for entrance areas in every sector. Unlike aluminium solutions, Treadloc 25 can withstand slight undulations in the sub-floor, which are sometimes unavoidable, without compromising the strength and performance of the product.


Treadloc 25 tiles are easily interchangeable and designed with interlocking male and female components for ease of installation. The versatile tiles can be quarter-turned during installation to create a checkerboard effect allowing for multi-directional entrances. There is also the added benefit of being able to purchase individual Treadloc 25 tiles, meaning any damaged tiles can be replaced with ease.

Treadloc 25 - Workspace Entrance Victor Inserts


INSERT OPTIONS



Workspace Entrance Victor




Workspace Entrance Vixen




Workspace Entrance Vulcan




Workspace Entrance Viscount




Premier Mercury



Premier Charcoal




Premier Dark Blue




MW Maxim Yellow and MW Maxim Anthracite


MW Rib HD inserts now available




Anthracite



Light Grey



Deep Blue



Natural

Dimensions	25cm x 25cm
Locking Guides	Easy Inter-locking system as standard. Removable male and female connectors.
Composition	Nitrile rubber composition
Dry Rubbing	(BS1006:X12) 4 - 5
Wet Shampoo	(851006:UK-TB) 4 - 5
Performance	Nitrile Rubber is resistant to oil, grease & fuel.
Resistant to stable temperatures	40-180 C
Wear Classification	Heavy Contract Class 33
Product Weight	Diamond 12,300g/m ² Premier 13,500g/m ²
Flammability	BS EN 13501 - Cfl-s2
Twice the weight of leading competitor products - twice the durability	



Treadloc 25 provides a flammability rating of Cfl-s2 (BS EN 14041:2004)



Perfect for Healthcare

The nitrile rubber in Treadloc 25 is now manufactured with copper compounds, a material that has been proven to have anti-microbial properties, combating the spread of hospital-acquired infections, including MRSA.



The product has been tested to ISO 22196, which specifies a method of evaluating the antibacterial activity of antibacterial-treated plastics, and other non-porous surfaces of products.

The results showed that the copper in the Treadloc 25 killed 99.29% of MRSA Bacterium.


When examined under the Coefficient of Friction test (TRRL Pendulum test in accordance with BS 7976-2:200+A1:2013), Treadloc 25 has been proven to provide a low risk for slips in both dry and wet conditions.



NO MATWELL OR RECESS? NO PROBLEM!
TREADLOC 25 HAS AN OPTIONAL CLICK-FIT RAMPING SYSTEM...



Dimensions: W 125mm x H 125mm

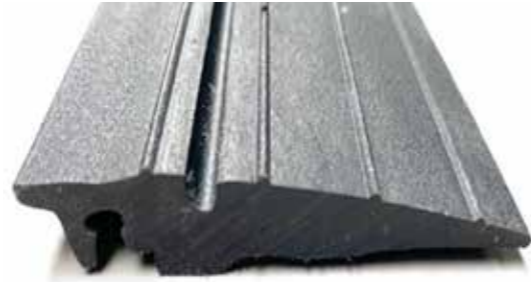

Dimensions: W 66mm x L 2000mm x H 12mm



Treadloc 25 shown in recessed matwells



Treadloc 25 shown with ramping solution



Treadloc 25
- Workspace Entrance Victor Inserts

TREADLOC 25 RAMPING SOLUTION


Description:

Treadloc 25 can be surface-mounted, with the option of a heavy duty click-fit ramping system, making the product suitable for buildings without a matwell or recess.

The heavy-duty ramped edges allow wheeled and trolley access, as well as helping to prevent trip accidents. The system allows our popular products to be used to create a 'surface matwell' where a mat is laid directly on top of the floor.

Key Features:

- Ramping system to enable Treadloc 25 to be surface-mounted
- Click fit mechanism for easy installation
- Made from durable nitrile rubber
- Pre-mitred corners for accuracy
- Available in 2m lengths
- Incorporate a colour of your choice into the ramp debris channel, for a striking and stand-out finish (as shown in the image on the left).

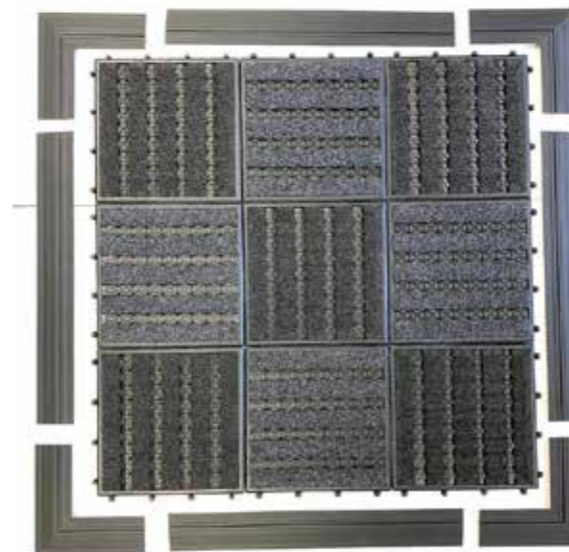

Treadloc 25 surface mounted with ramping solution





PRIMARY
ENTRACK 50

Entrack 50 - MW Rib Anthracite Inserts

INSERT OPTIONS



Workspace Entrance Vulcan



Workspace Entrance Victor




Workspace Entrance Viscount




Workspace Entrance Vixen




Premier Dark Blue



Premier Charcoal




Premier Mercury



MW Rib Anthracite



MW Rib Light Grey



EXT Mat Anthracite


Dimensions	50cm x 50cm
Insert Width	85mm
Connection	Integral 'lock down' fixing system
Colourway Options	10
Environmental options	Recyclable and reusable
Base	Non-pvc polymer base



With its click fit connections, Entrack 50 can be installed with ease.



Connect Entrack 50 together to create any size entrance mat required:

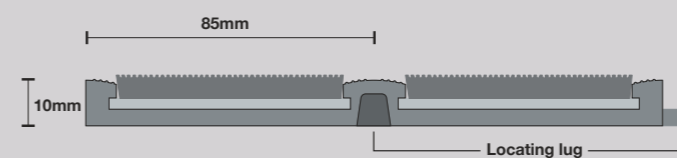


A flexible modular system made from TPE which will not expand, contract or fade in colour. An extremely versatile product, Entrack 50 carpet strips are interchangeable and are suitable for entrances with or without matwells.

- High specification low profile platform
- Easy to cut and shape to bespoke patterns
- Recyclable and reusable
- Will not tap, bounce or buckle under heavy footfall
- Easily cut and trimmed on site
- Made in Britain
- Suitable for external or internal areas



MADE IN BRITAIN

Tile colours representative in print, order a full tile for true likeness.

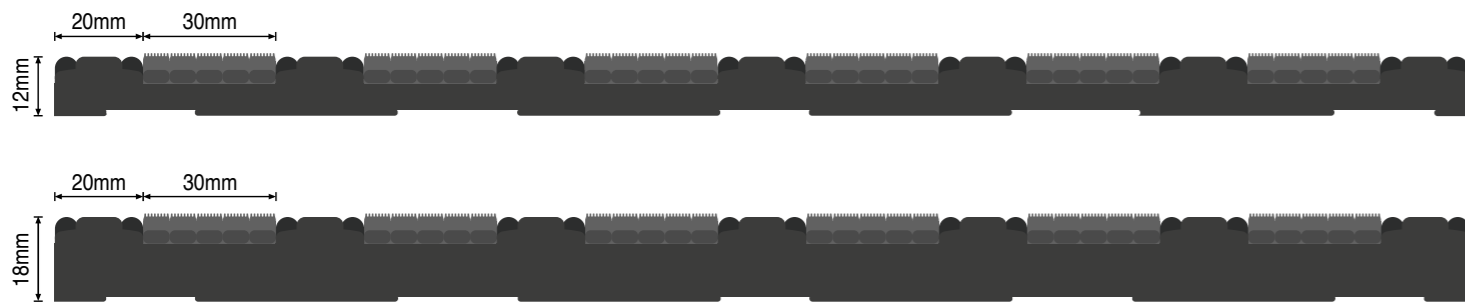

TREADSURE 205

Description:

Treadsure 205 by Mat.Works Entrance Solutions has been designed not just for extremely heavy footfall but also with wheeled traffic entrances in supermarkets, retail, education, and healthcare in mind - providing an alternative to aluminium matting systems. Manufactured from nitrile rubber to provide optimum performance and has a host of key features that set the product apart from any other standard modular matting system.

One of these is its sheer durability, which is provided by the product size and weight, ensuring it is one of the heaviest modular matting solutions available on the market. This sturdiness of Treadsure 205 provides significant durability when installed. It will not expand, contract, fade or become brittle, nor will it bend or buckle under pressure making it an ideal heavy contract solution for entrance areas in every sector.

The weight ensures, when installed correctly, that Treadsure will not move or slip in the matwell. It also makes installation easier, as there are no click or interlocking systems. If more than one system is needed, the modules are simply placed next to each other - significantly reducing any potential installation times.

Simple to install in most matwells.

Weight cannot be rivalled in the current market.

Will not buckle or bounce under pressure, making it suitable for wheel and trolley traffic.

Perfect for healthcare environments due to its copper compounds - a material that has been proven to have anti-microbial properties, combating the spread of hospital-acquired infections, including MRSA. Can be fitted with a host of carpet inserts and debris channel fillers to match any style.

Can be fitted with a host of carpet inserts to match any style.

A cost-effective solution when compared to aluminium products.

Treadsure 205
- MW Rib Anthracite Inserts


INSERT OPTIONS



MW Rib HD
Anthracite



MW Rib HD
Light Grey




MW Rib HD
Natural



MW Rib HD
Deep Blue




Workspace Entrance
Viscount




Workspace Entrance
Vulcan



Workspace Entrance
Victor



Workspace Entrance
Vixen




MW Maxim Yellow and MW
Maxim Anthracite (Safety
Colour Inserts)



Premier Dark Blue




Premier Charcoal



Premier Mercury


Technical data:

Module Size	205cm x 50cm x 12mm / 18mm
Seamless Installation	Seamlessly place two or more modules next to each other without the need for any locking mechanism
Composition	Nitrile rubber composition
Performance	Nitrile rubber is resistant to oil, grease, and fuel
Wear Classification	Heavy Contract Class 33
Weight	14,000g/m ² (12mm), 20,000g/m ² (18m)
Fire Rating	CFL-S2
Anti-Microbial	Tested to ISO 22196
Anti-Slip	TRRL Pendulum test - very low risk for slips in both dry and wet conditions

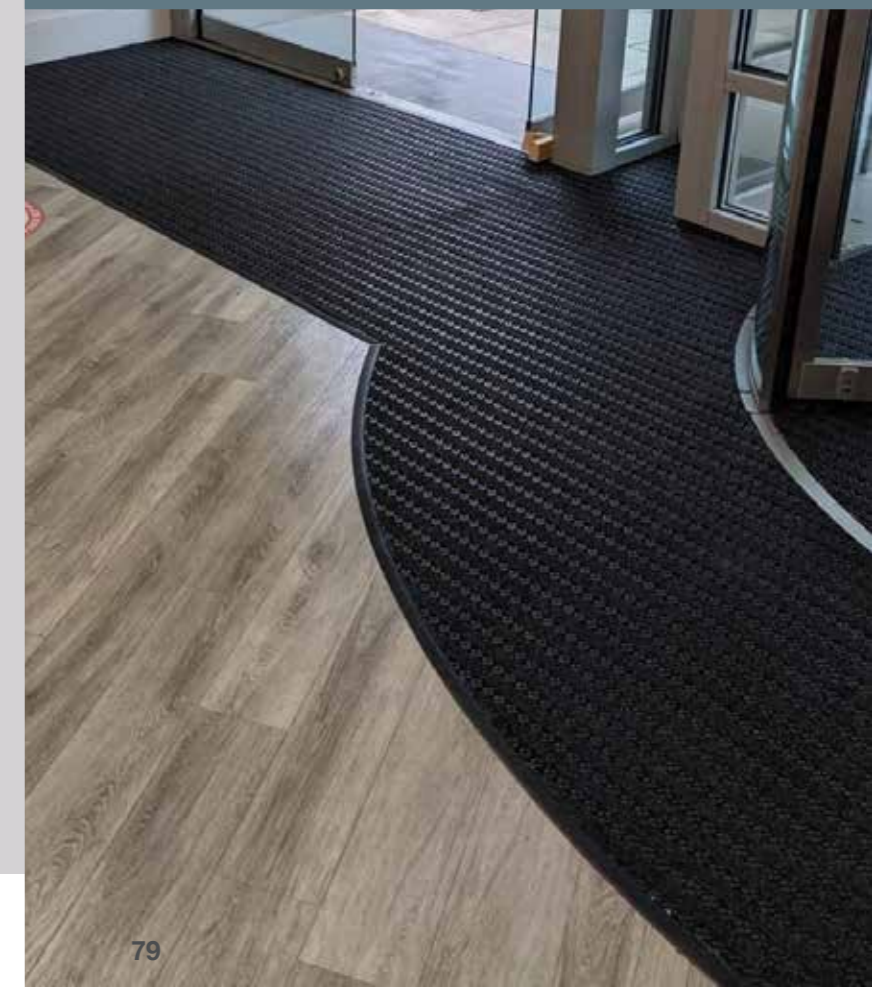




Workspace Entrance - Vulcan

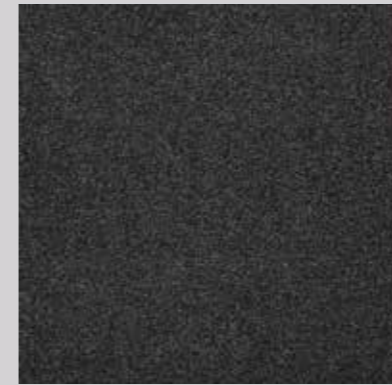


Vulcan
(LRV - 3.48)



Vixen
(LRV - 3.24)



Victor
(LRV - 4.87)



Viscount
(LRV - 2.69)

Style	1/10th Gauge
Yarn Construction	100% solution dyed nylon
Pile Yarn Weight	1,000g/m ²
Pile Height	5mm +/- 0.5mm
Total Weight	Tile 4,800g/m ² / Sheet 1,800g/m ²
Pile Density	114,260 tufts per square metre
Total Thickness	Tile 9mm / Sheet 8mm
Backing	100% Envirobase backing with minimum of 75% recycled material / Unitary Bac
Dimensions	50cm x 50cm tile / 2m x 20m
Wear Classification	Heavy Contract Class 33
Colour Fastness	To Water - 5 To Light - 5 To Rubbing - 4.5
Flammability	BS 4790 - Low Radius of Char BS EN 13501 - CfI-s1
Warranty	10 years
VOC Content	E1 in relation to EN 14041:2004



TOTAL COLOURWAY OPTIONS - 4

- All products conform to BS8300
- Low LRV values compared to aluminium, LVL and fibrebonded products ensuring a positive point difference is easy to achieve for areas where partially sighted traffic will be important to consider
- Equalities Act 2010 compliant
- Entrance matting resistant to point loading and scuffing from rubber wheels and walking aids

AVAILABLE
FROM STOCK



Tile colours representative in print, order a sample for true likeness.



OUR FUTURE OUR HISTORY

COMMITTED TO SUSTAINABLE UK MANUFACTURING



paragon

CARPET TILES

Discover more about Paragon Carpet Tiles, one of the UK's leading design-led carpet tile manufacturers.



Environment

The Environmental culture at Paragon Carpet Tiles is '**reduce, reuse, recycle**'. Our materials are from sustainable sources/ with recycled content wherever possible. Employees are actively involved in setting and monitoring the achievement of environmental objectives and targets.

Air emissions from the production process are independently monitored for their environmental impact. Analysis has confirmed that emissions are less than 1% of Government targets.

Manufacturing activity and its impact on the environment are regularly audited by environmental health officers and have been confirmed as 'low risk', with a rating of 5 out of 175.

British Standards regularly audit the Environmental and Quality Management Systems to ensure continued compliance to accredited standards and to demonstrate continuous improvement.



UP TO **80%**
OF EACH PRODUCT
IS MADE USING
RECYCLED MATERIAL.



PARAGON
CARPET TILES
OPERATES A
ZERO WASTE TO
LANDFILL POLICY



ISO 14001
Environmental
Management System



breglobal
Environmentally
Profiled products



ISO 9001
Quality Management
System



Sustainable Manufacturing

The materials used within our production processes are from sustainable and ethical sources, and we strive to include recycled/reclaimed content wherever possible.

The current standard manufacturing process includes:

- NFC Envirobase backing which contains over 75% recycled material
- Latex pre-coat backing which contains over 75% recycled material
- Up to 80% of the total product is made using recycled materials
- Carpet yarns contain up to 100% recycled content
- Pallets obtained from sustainable sources (FSC certified)
- Tile boxes are 100% recycled cardboard
- Production processes are not water dependent
- Committed to sustainable UK manufacturing
- Members of considerate constructors scheme
- BREAM compliant
- Environmental Product Declarations (EPDs) available



CLEANING & MAINTENANCE GUIDE

To maximise the carpet's aesthetic appeal, performance and life expectancy, it is imperative to ensure at the specification stage that:

1. Carpets will be protected from other site activities during installation and thereafter.
2. Clients understand the enclosed information and that they accept responsibility for correct carpet care.
3. Carpets are protected from excess soiling or moisture in entrance areas, by use of an effective barrier material such as those from the MatWorks range

GENERAL CLEANING

Daily vacuuming with a twin motored upright vacuum cleaner, preferably with an adjustable head, is recommended. It is essential to remove all loose soil daily because if left to build up, the particles of dirt are much harder to remove and are more damaging to the fibre structure, thereby decreasing the life of the carpet.

Attention should be given to areas where there is extra traffic and in entrances to buildings where extra vacuuming is necessary.

Depending on the level of installation trafficking, the carpet should be periodically deep cleaned using high performance hot water extraction equipment.

Rotary brush cleaning not recommended.

A reputable contract cleaner should be used, preferably NCCA registered (for NCCA details visit www.ncca.co.uk). It is important that the carpet is deep cleaned at least once a year.

STAIN REMOVAL

It is essential to deal with spillages immediately and any subsequent stains as appropriate.

In the event of a spillage, immediately blot with a clean absorbent cloth until there is no further transfer from the carpet to the cloth. If any further stain remains or has otherwise been allowed to dry, the method will vary accordingly.

It is recognised that particularly for contract situations, if stains are not dealt with immediately, cleaning staff may not be in a position to identify the type of stain. A good quality, multipurpose stain remover is therefore very useful, although it must be understood that this will not successfully tackle all types of stains, and wherever possible the chart recommendations should be strictly followed.

Also any stains left over a period of time become increasingly more difficult to remove and may require several treatments.

In all cases, after stain removal, the carpet should be allowed to dry completely and then cleaned with a twin motored upright vacuum cleaner.

Solvent cleaning of bitumen backed tiles should preferably be avoided. Where this is not possible, extra caution should be taken and only very light surface cleaning should take place.

If any of the treatments listed are not successful, seek professional help.

The methods are recommended in good faith; however, we cannot accept responsibility for their use in any specific case.

CLEANING GUIDE

Stain Type	Stain Removal Procedure
Tea / Coffee Food Fountain Pen Ink Water Based Paint	A liquid detergent solution such as Granwax Ezee Spot & Stain Remover. Apply the solution to the stained area. Lightly agitate affected areas & remove by use of absorbent cloth. Stubborn stains may require a second application.
Chewing Gum	Apply chewing gum remover then break-up and remove pieces or pierce gum with fork or Prochem Perforator Block then apply Citrus Gel or Solvall Spotter and leave for a few minutes. Remove softened gum with spatula or blunt knife. For large areas apply Bazooka Gum Remover in conjunction with Bazooka Gum Removal Machine.
Grease	Scrape up excess, hardened residue prior to wetting. Apply Solvex or Solvall Spotter and blot. Apply Citrus Gel and blot. Apply Stain Pro and blot. For larger areas apply Power Burst then rinse extract thoroughly.
Ink (solvent soluble)	Apply Solvex and blot – do not rub. Repeat as needed. If stain persists, apply Citrus Gel. Rinse thoroughly with water and blot until dry. Note: All inks are not the same and different approaches may have to be evaluated.
Milk	Apply Stain Pro and blot. Apply Fibre & Fabric Rinse solution and blot until dry. If stain persists apply Solvex or Citrus Gel and blot. Apply Neutral Pro-Spotter and blot. Rinse thoroughly with water and blot until dry.
Oils	Apply Solvall Spotter and blot or apply Citrus Gel and blot or apply Solvex and blot until dry. Where a solvent cannot be used apply Power Burst solution, brush and rinse with Fibre & Fabric Rinse solution.
Oil Based Paint / Varnish	Apply Solvall Spotter and blot or apply Citrus Gel and blot or apply Solvex and blot. Re-apply Solvex until as much paint as possible is removed then weight down the stain with towels for several hours to loosen. Apply Neutral Pro-Spotter, work into stain then blot. Rinse thoroughly with water and blot until dry.
Shoe Polish	Apply Solvex or Solvall Spotter & blot. Apply Citrus Gel & blot. Rinse thoroughly with water & blot until dry
Tar & Asphalt	Scrape off as much as possible with blunt knife. Apply Solvall Spotter or Solvex and blot. Apply Citrus Gel and blot. Apply Neutral Pro-Spotter and blot then rinse thoroughly with water and blot until dry.

Health and Safety

Please ensure that for all above referenced items, the manufacturers' use & safety instructions are adhered to.

Granwax Ezee Spot & Stain Remover can be obtained from Granwax Products Ltd; Telephone 01773 541177
Other products listed can be obtained from Prochem Europe Ltd; Telephone 020 8974 1515

EXPERIENCE CARPET TILES



Farfield Park, Manvers, Wath-upon-Deerne, Rotherham, S63 5DB
T. +44 (0) 1709 763 839 E. sales@paragon-carpets.co.uk

www.paragon-carpets.co.uk

Samples Department: E. samples@paragon-carpets.co.uk T. +44 (0)1709 763 805

Showroom Address: Verco, Clerkenwell House, 67 Clerkenwell Road, Ground Floor East, London, EC1R 5BL